



CONCENTRIC & ECCENTRIC FIBREGLASS REDUCERS

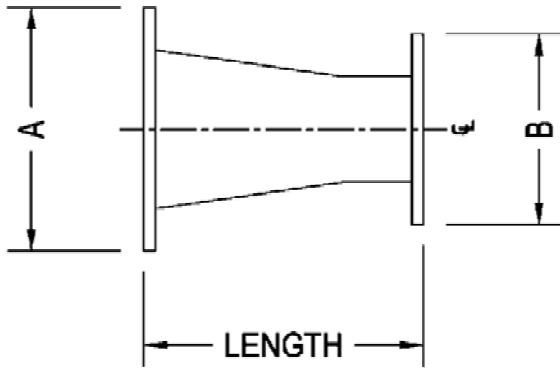

CONCENTRIC STYLE

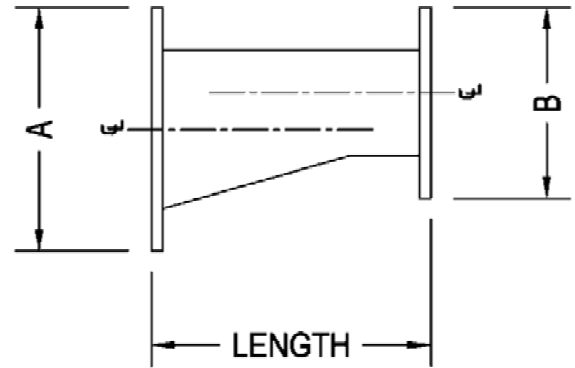

ECCENTRIC STYLE

AVAILABLE SIZES

A x B	LENGTH	CONCENTRIC PART #	ECCENTRIC PART #
16" x 14"	14"	9402-2020	9402-2044
16" x 12"	14"	9402-2021	9402-2045
16" x 10"	14"	9402-2022	9402-2046
16" x 8"	14"	9402-2023	9402-2047
14" x 10"	14"	9402-2024	9402-2048
14" x 8"	14"	9402-2025	9402-2049
12" x 10"	14"	9402-2026	9402-2050
12" x 8"	14"	9402-2027	9402-2051
12" x 6"	14"	9402-2028	9402-2052
12" x 5"	14"	9402-2030	9402-2053
10" x 8"	14"	9402-2031	9402-2054
10" x 6"	14"	9402-2032	9402-2055
10" x 5"	14"	9402-2033	9402-2056
8" x 6"	12"	9402-2034	9402-2057
8" x 5"	12"	9402-2035	9402-2058
8" x 4"	12"	9402-2036	9402-2059
6" x 5"	12"	9402-2037	9402-2060
6" x 4"	12"	9402-2038	9402-2061
6" x 3"	12"	9402-2039	9402-2062
4" x 3"	9"	9402-2040	9402-2063
4" x 2-1/2"	9"	9402-2042	9402-2064
4" x 2"	9"	9402-2043	9402-2065

FLANGE DATA

I.D.	O.D.	B.C.	# HOLES	HOLE Ø	FLG. THK.
16"	24"	21 1/4"	16	1 1/8"	1-3/16"
14"	21 1/2"	18 3/4"	12	1 1/8"	1-1/16"
12"	19 1/2"	17"	12	1"	1"
10"	16 1/2"	14 1/4"	12	1"	7/8"
8"	14"	11 3/4"	8	7/8"	3/4"
6"	11 1/2"	9 1/2"	8	7/8"	5/8"
5"	10 1/2"	8 1/2"	8	7/8"	5/8"
4"	9 1/2"	7 1/2"	8	3/4"	9/16"
3"	8"	6"	4	3/4"	1/2"
2 1/2"	7 1/2"	5 1/2"	4	3/4"	1/2"
2"	6 1/2"	4 3/4"	4	3/4"	1/2"

All flanged fiberglass reducers are rated to 50 psi pressure rating.

Flanges are flat face with 150 lb ANSI drilling patterns.

Shorter or longer lengths can be made special order to fit a specific situation.